

LUCK NOW


Quality Products Since 1968

Manufactured by:
Helm Welding (1983) Limited


Snowblowers "Double Auger"

Standard Features


Greaseable 1 7/16" bearings




Extra heavy augers and shafts

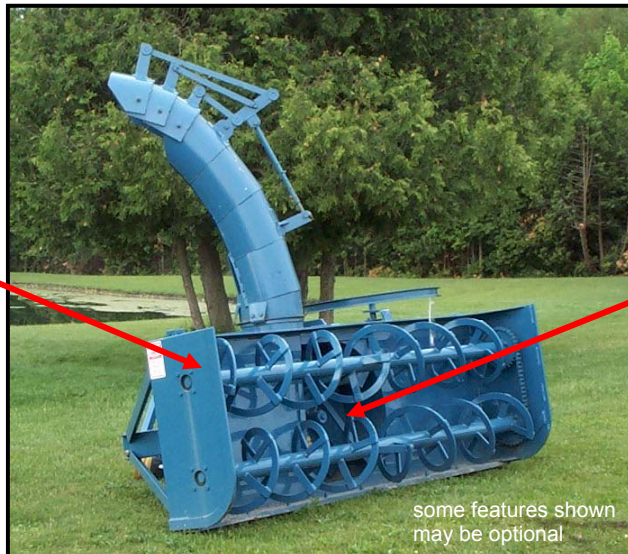

All blowers equipped with 4-blade fan



Shear bolt protection



Heavy-duty gearbox with heat-treated gears and tapered roller bearings



Optional Equipment

- Hydraulic chute rotator
- Single stage spout deflector
- 3 stage spout deflector
- Orbital motor chute rotator
- Truck loading chute extension
- Heavy reinforced end plates
- Skid shoes
- Quick hitch set-up
- Weld on cutting edge
- Reversible bolt on cutting edge
- Cylinder c/w hoses & fittings
- 1,000 rpm (not available on D7 model, standard on D9000H model)

other options available upon request

See the Photo Gallery Section of our website for pictures of various options.

Specification Table (Double Auger Units)

MODEL SIZE	D7	D75H	D80H	D85H	D9000H
Weight	1125	1460	1475	1615	2010
Cutting Width	84	90	96	102	108
Cutting Height	36	36	36	36	36
Fan Shaft Diameter	40 mm	1 ¾	1 ¾	2	2
Fan Blades	4	4	4	4	4
Fan Diameter	28	28	28	30	32
Fan Housing Width	8	12	12	12	12
Fan Housing (thickness)	10 ga.	3/16 ga.	3/16 ga.	3/16 ga.	3/16 ga.
Auger Diameter	17	17	17	17	17
Auger Shaft Diameter	1 7/16	1 7/16	1 7/16	1 7/16	1 7/16
Auger Flighting Thickness	½	½	½	½	½
Auger Chain Size	#60	#80	#80	#80	#80
Chute Diameter	12	13	13	13	13
Chute Length	48	48	48	48	48
Hitch Category	1 & 2	2	2	2	2
Rec. H.P. (min)	50	80	70	100	100
Rec. H.P. (max)	90	105	105	150	150

H.P. recommendations are suggested only (pending snow and ground speed conditions)

Unless otherwise indicated, all dimensions are in inches with standard equipment installed.

Specifications subject to change without notice.

Certain features shown may be optional.